

JalPar7 Quad Zoom

JalPar7 Quad Zoom is a ultra compact & lightweight LED par zoom, only 7.0 kgs, delivering up to 30,600Lux@5m, equipped 3.2 ° -48 ° motorized zoom range and extremely 24-bit smooth dimming technology, preset LEE colors and CCT, factory color calibration system precise retain consistency colors, durable construction and elegant design for all weathers, tailored for indoor or outdoor applications, concets, events, touring, theater, and TV etc.

LIGHT SOURCE

Light Source
7x50W RGBL LEDs (optional RGBW)

CRI
CRI≥83@3200K (RGBL)
CRI≥90, R9≥90 (CCT mode, RGBW)

Lux
30,600Lux@5meter (RGBL)
28,600Lux@5meter (RGBW)

Color Temperature (range)
1800K-10000K (RGBL)
2700K-8000K(RGBW)

Source Life Expectancy
50,000 hours

OPTICS

Beam Angle
3.2°-38°

Field Angle
6.0°-48°

DYNAMIC EFFECTS

Dimming
24-bit, extremely smooth electronic dimming

Dimmer Modes
4 selectable dimming modes available

Dimming Curve
4 selectable dimming curves available

Strobe/Shutter
Electronic

Strobe Rate
0 - 30 Hz

One-Push Button (Focus Mode)
Yes

Color Temperature Presets
Yes

CONTROL

Control Protocol
DMX,RDM,Art-net, sACN

DMX Channels
1/2/4/7/8/13/14/18/9/9ch

Firmware Upgrade
Built-in program copying function, DMX, USB-C

CONNECTIONS

Power Connection
Seetronic powerCON TRUE In/Out IP65

Signal Connection
Seetronic 3/5-pin XLR In/Out IP65

Firmware Connection
USB-C

ELECTRICAL

Input Voltage
90-240VAC 50/60Hz

Max power consumption
305W

Power and Current
297 W, 3.24 A @ 110 V, 60 Hz
295 W, 3.22 A @ 110 V, 50 Hz
292 W, 1.53 A @ 230 V, 60 Hz
293 W, 1.54 A @ 230 V, 50 Hz

Power Linking
4units @ 110 V; 8units @ 230 V

PHYSICAL

Housing Material
Die-cast magnesium aluminum,black

Cooling
Temp controlled, noiseless fan for forced air

Temperature (Ambient)
4 °F to 113 °F (-20 °C to +45 °C)

Dimensions
311.6x339.9x173.0mm

Weight
7.0kgs

IP rating
IP66

CERTIFICATIONS

Certifications
CE, RoHS

OPTIONAL ACCESSORIES

DMX Cable IP
OMEGA
Barndoor
Tophut
Diffuser(15°x1°,30°,50°,60°)



Light Source
7x50W RGBL/RGBW LEDs


Illuminance
30,600Lux@5m

Zoom Angle
3.2°-48°

Weight
7.0kgs

Protection Rated
IP66

DIMENSION

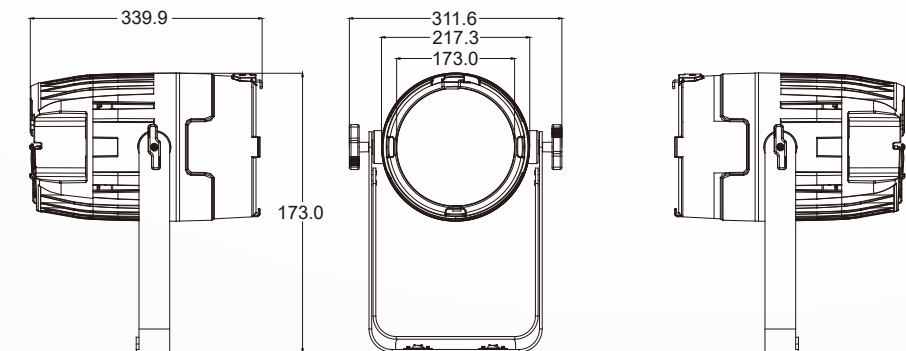

PHOTOMETRIC

